


Céliane™ Shaver socket

Cat. No(s): CM0135

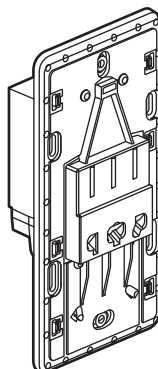


1. USE

Equipped with a circuit separation transformer to isolate the user from the mains supply.
Socket outlets for different international standards: euro, US, british standard, australian.
Can be flush-mounted or surface-mounted in a flush-mounting box or frame (0 802 42) 2 stations 50 mm deep.

2. RANGE

Description	Cat. No
Shaver socket with support frame	CM0135

3. DIMENSIONS (mm)

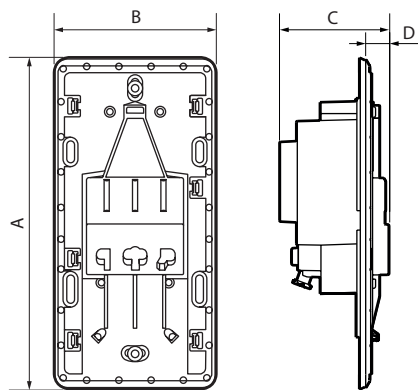

A	B	C	D
154	75.5	51	11

4. CONNEXION

Type of terminals: automatic
Terminal capacity: 2 x 2.5 mm² or 2 x 1.5 mm²
Stripping length: 13 mm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact tests: IK 04
Protection against solide bodies and liquids: IP 24

■ 5.2 Material characteristics

Polycarbonate

Self-extinguishing:

850°C/30 s for insulating components holding live parts in place.
650°C/30 s for other insulating components.

■ 5.3 Electrical characteristics

Protected against overloads and short circuits by built-in thermal relay limiting the available power to 20 VA.
Power supply: 230 V~ and 1 output 120 VA to 230 VA
Frequency: 50/60 Hz

■ 5.4 Climate characteristics

Storage temperature: -10°C to +70°C
Usage temperature: +10°C to +25°C

6. CLEANING

Surface cleaning with a cloth

7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
See e-catalogue.