


MEGA GÜRTELLINSE

611887.004 | Bollards



Bollards
4051859426899
D 140, H 1000

free-standing
silver, matt (approx. RAL 9006)

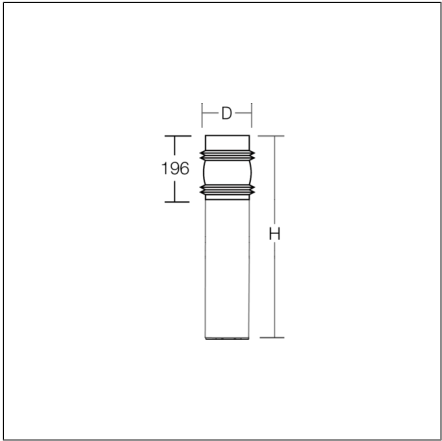

Classic bollard with innovative housing design and high-quality LED optics. Luminaire tube Ø 115 mm made of corrosion-resistant aluminium profile, powder coated. Recessed stainless steel fixing plate. Non-corrosive gear compartment made of mould-cast dual compound thermoplastic with integral TP gasket. With membrane valve as a standard to avoid condensed water. Seawater resistant coating. Mouth-blown luminaire glass, clear, drum lens shape. A light transmission bar made of highly transparent, clear plastic (PMMA) with lasered optical structure diverts the light horizontally, ensuring optimum and even light distribution on the floor. The robust stainless steel mounting base ensures long-term stability. Elongated holes in the base for subsequent and simple alignment of the luminaire. Connection box on base, max. 2 x 3 x 2.5 mm² for through wiring.

Product specifications

Diameter D	140 mm
Height H	1000 mm
Weight	4.48 kg
Light source	1 x QA60 (clear) max. 57 W, E27
Rated luminous flux	520 lm
System power	57 W
System efficiency	9 lm/W
Glare evaluation UGR (4H 8H)	22,9
Beam angle	down 157°/157° up 41°/42°
Driver	Not necessary
Control	on/off
Voltage	0 - 250 V / 0 - 60 Hz
CIE Flux Code / CEN Flux Code	14 33 81 78 57
Type of protection	IP 65
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK02
Ambient temperature	-20 °C ... + 35 °C
Conformity mark	CE, EAC

Accessories



982103.000
Accessory for ground installation

MEGA GÜRTELLINSE

611887.004 | Bollards



Spareparts



982553.004
Luminaire head, silver