


# MEGA TOWER R

611995.004.1.76 | Bollards



Bollards  
4051859932673  
D 115, H 1050

free-standing  
silver, matt (approx. RAL 9006)

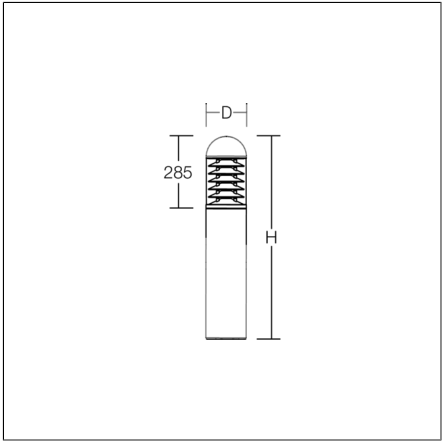

Attractive cylindrical bollard with innovative housing design and high-quality LED optics. Luminaire tube made of corrosion-resistant aluminium profile, powder coated. Recessed stainless steel fixing plate. Non-corrosive gear compartment made of mould-cast dual compound thermoplastic with integral TP gasket. With membrane valve to avoid condensation. Seawater resistant coating. Luminaire head made of corrosion-resistant pressure die-cast aluminium, powder-coated, with transparent cylinder (glass) and translucent anti-glare louvres. The robust stainless steel mounting base ensures long-term stability. Elongated holes in the base for subsequent and simple alignment of the luminaire. Driver integrated. Delivered with pre-installed connecting cable.

### Product specifications

Diameter D	115 mm
Height H	1050 mm
Weight	4.6 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	920 lm
System power	10 W
System efficiency	92 lm/W
Glare evaluation UGR (4H 8H)	25,1
Beam angle	down 90°/90°/90°/90° up 90°/90°/90°/90°
Rated life	60000 h (L80/B50)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	80
Luminaires on B16A fuse	130
Inrush current / Inrush current duration	5 A / 100 µs
CIE Flux Code / CEN Flux Code	8 34 71 62 100
Type of protection	IP 65
Protection class	I
Filament test	650 °C
Impact resistance	IK05
Ambient temperature	-20 °C ... + 50 °C
Conformity mark	CE, EAC

### Accessories



982103.000  
Accessory for ground installation



982981.003  
Junction box H with strain relief.


# MEGA TOWER R

611995.004.1.76 | Bollards



982974.003

## Spareparts



982261.004  
Luminaire head, silver