


# BARIS 40 LED N VD 2700LM PLX I KL. IP20 1421 MM 840 BLACK 39W

DETAILED CARD

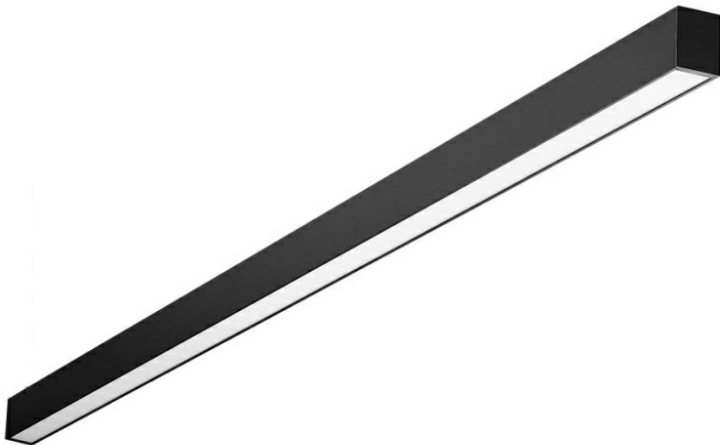

## TECHNICAL PARAMETERS

Index:	319808
Rated power of the luminaire [W]*:	39
Luminous flux [lm]*:	2700
Colour temperature [K]:	4000
Ingress protection:	IP20
Energy efficiency class:	G
Material of the body:	aluminium
Colour of the body:	black
Diffuser type:	OPAL
Mounting version:	surface

## CHARACTERISTICS

Suspended or surface-mounted luminaire with a very narrow cross-section. The bodies are available as an anodised aluminium profile in grey or as an aluminium profile painted in white or black (other colours available on request). Optical system in the form of an opal cover. The luminaire is equipped with a unique suspension system that facilitates mounting and adjustment of the suspension length. All suspended BARIS LED VD luminaires have slings with a box included in the set.

## APPLICATION

The luminaire is intended for indoor use. Unique design, energy-saving LED modules, and possible integration with external lighting control systems in the DALI standard make this luminaire suitable for use in modern office buildings, with particular emphasis on representative rooms. Versions marked "VD" are only intended for use in traffic zones and corridors inside buildings included in Table 5.1 of EN12464.

# BARIS 40 LED N VD 2700LM PLX I KL. IP20 1421 MM 840 BLACK 39W

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	319808	Material of the body:	aluminium
EAN:	5905963319808	Dimensions (H/W/T/S) [mm]:	53/40/1421
Rated power of the luminaire [W]:	39	Ingress protection:	IP20
Light source:	LED	Mounting dimensions [mm]:	1352
Colour temperature [K]:	4000	Mounting version:	surface
Frequency [Hz]:	50 - 60	Net weight [kg]:	1.190
Luminous flux [lm]:	2700	Category type:	battens
Diffuser type:	OPAL	AC voltage range [V]:	220 - 240
Energy efficiency class:	G	LED lifespan L70B50 [h]:	113500
Nominal power [W]:	33	LED lifespan L80B20 [h]:	71500
Luminous efficacy [lm/W]:	68	LED lifespan L90B10 [h]:	34500
Electrical protection class:	I	CE certificate:	<a href="#">307/2023</a>
Colour rendering index:	>80	ENEC Certificate:	<a href="#">PL BBJ/003/2022/M1/A1</a>
SDCM:	≤ 3	PZH certificate:	<a href="#">B-BK-60212-0109/21</a>
Diffuser material:	PS	Warranty [years]:	3
Diffuser colour:	white	Manual:	<a href="#">Download PDF</a>
Colour of the body:	black	Impact resistance:	IK03

## LIGHT CURVES

