

## PRODUCT DATASHEET DALI PRO 2 IOT

DALI PRO 2 IOT | Controllers for wired IoT Light management systems



### Areas of application

- Room control, floor control, daylight-dependent control
- Connection of light and presence sensors in DALI systems
- Conference rooms
- Offices: Individual and group workplaces
- Production and assembly facilities
- Suitable for indoor applications
- Large luminaire groups
- Industry
- Corridors
- Strip lighting
- Logistic centers
- Classrooms
- Sports halls
- Training rooms

### Product benefits

- DALI-2 standard meets many tender requirements
- Profile based commissioning on jobsite
- Building Management Systems integration possible (e.g. KNX interface)
- Central control functions & individual light control via KNX possible

### Product features


- DALI-2 certified
- Feature-rich local LMS based on DALI Professional
- IoT ready with built-in gateway for remote data access
- Existing DALI Pro PC Software compatible
- Easy browser-based commissioning UI and Professional Software available
- Small form factor: only 6 TE (DIN rail)
- Commissioning via Ethernet/WLAN

## TECHNICAL DATA

### Electrical data

Nominal wattage	20.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz

### Dimensions & Weight

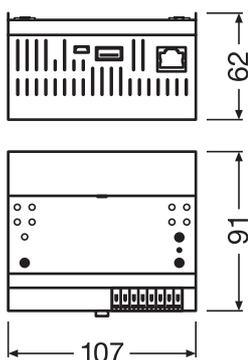

Length	91.00 mm
Width	106.00 mm
Height	62.00 mm
Product weight	247.00 g

### Colors & materials

Product color	Light grey
---------------	------------

### Temperatures & operating conditions

Ambient temperature range	0...+40 °C
---------------------------	------------

### Additional product data

Commissioning tool	PC Tool (Windows) / WebUI
Max. connectable push button couplers	16
Number of connectable sensors	12
Groups	2x16

### Capabilities

Dimmable	Yes
Dimming interface	DALI-2
Number of control outputs	2

Type of installation	Din Rail
----------------------	----------

**Certificates & Standards**

Approval marks – approval	CE
Protection class	II
Type of protection	IP20

**EQUIPMENT / ACCESSORIES**

- Easy browser-based commissioning UI (for smart devices)

**DOWNLOAD DATA**

**Documents and certificates**



User instruction

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4062172114189	Folding box 1			
4062172114196	Shipping box 20	235 mm x 199 mm x 372 mm	5665.00 g	17.40 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.