


GOLAS maxi

911603.002 | Recessed projectors



Recessed projectors
4051859858515
D 178, H 3

Recessed ceiling mounting
traffic white, matt (RAL 9016)

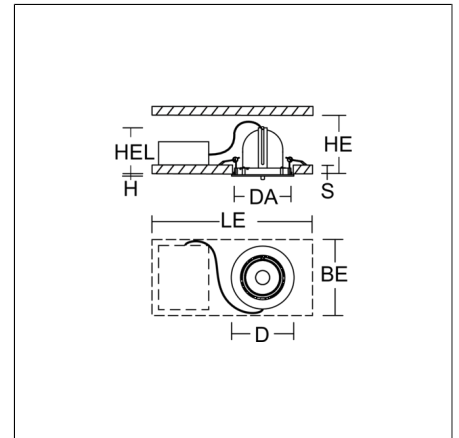

Recessed LED projector for illuminating points to be highlighted. Housing: die-cast aluminium, powder-coated. 356° rotation range and 90° swivel range. Black plastic ring and recessed LED to prevent glare from the side. Optical assembly with lens made of plastic (polycarbonate) for the best homogeneous light distribution - can be changed without tools. Special LED for illumination of meat included. Suitable for Recessed ceiling mounting. Installation without tools thanks to spring fastening system. Including separate LED converter with connecting cable 600 mm. High quality converter without flickering and stroboscopic effect. Through-wiring box (5 pole) available as accessory. The following accessories can be mounted without use of tools: interchangeable lenses, decorative glasses, honeycomb louvre, clear and frosted diffusers, white interchangeable plastic ring.

Product specifications

Diameter D	178 mm
Height H	3 mm
Cut-out diameter DA	168 mm
Luminaire: recess height HEL	150 mm
Ceiling thickness S	1-20 mm
Installation space length LE	550 mm
Installation space width BE	350 mm
Installation space height HE	200 mm
Weight	1.78 kg
Light source	LED
Colour temperature	fresh meat
Rated luminous flux	1750 lm
System power	33 W
System efficiency	53 lm/W
Glare evaluation UGR (4H 8H)	13
Beam angle	35°
Rated life	50000 h (L90/B10)
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	21
Luminaires on B16A fuse	34
Luminaires on C10A fuse	35
Luminaires on C16A fuse	57
Inrush current / Inrush current duration	12.6 A / 250 µs
CIE Flux Code / CEN Flux Code	96 99 100 100 100
Type of protection	IP 20
Protection class	II
Filament test	650 °C
Impact resistance	IK06
Ambient temperature	-20 °C ... + 25 °C
Safety marks	Do not cover the recessed luminaire!
Conformity mark	CE, EAC


Accessories



982373.003
Spot lens



982373.023
Flood lens



982374.000
Diffuser, transparent



982422.002
White plastic ring for lens.



982372.013
Reflector medium




982372.033
Reflector wide flood



982703.002
Through-wiring box



982373.013
Medium lens



982375.003
Anti-glare honeycomb louvre



982374.010
Diffuser, satinated



982372.003
Reflector spot



982372.023
Reflector flood



982420.002
White plastic ring for reflector.